



VENDED STACK DRYER

Huebsch® stack dryer/dryers give your laundry all the benefits of two stand-alone dryers in the space of one machine. The stack utilizes all the same connections as a standard dryers, so there are no special hookups required.

FAST DRYING TIMES

Huebsch dryers offer a 7.0 cu. ft. cylinder with an 18 lb capacity offers ample space for large loads to tumble and produce fast drying times, while lowering utility consumption.

SOLID BASE

Huebsch dryers are built on sturdy steel bases to ensure years of worry-free performance.

SPACE SAVINGS

A stack dryer/dryer gives your vended laundry all the benefits of two stand-alone dryers in the space of one machine. The stack utilizes all the same connections as a standard dryer, so there are no special hookups required.


UNMATCHED DURABILITY

Our vended stack dryer is manufactured at our Ripon, WI headquarters. The entire machine receives Huebsch's standard three-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

*Parts only, labor not included. See Huebsch Warranty Bond for specifics.



MICRO-DISPLAY CONTROL

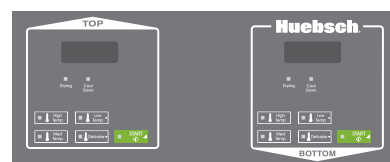

The Micro-Display Control features a time-remaining countdown, coin countdown and cycle status lights.

VENDED STACK DRYER

Specifications

Available Controls	MDC	Coin Slide
Models	Electric HSEBCAGW171TW01 HSEBYAGW171TW01 HSEBEAGW291CW01 HSEBDAGW291CW01 HSEBYAGW281CW01 HSEBYAGW291CW01	HSEBXAGW171TW01
	Gas HSGBCAGW111TW01 HSGBYAGW111TW01 HSGBEAGW091CW01 HSGBDAGW091CW01 HSGBXAGW091CW01 HSGBYAGW091CW01	HSGSXAGW111TW01 HSGSXAGW091CW01
Capacity - lb (kg)	18 (8.2)	
Cylinder Volume - cu. Ft. (liters)	7.0 (198)	
Width - in (mm)	26 7/8 (683)	
Depth - in (mm)	28 (711)	
Height - in (mm)	78 3/16 (1986)	
Motor Size - HP (kw)	1/3 (0.25)	
Available Heat Sources	Electric or Gas	
Available Heating Element - (Electric W)	4750 @ 208V 5350 @ 240V	
Gas Inlet Connection - in (mm)	3/8 (9.5)	
Gas Consumption - BTU/Hr	25,000	
Exhaust Outlet Diameter - in (mm)	4 (102)	
Exhaust Airflow - cfm (liters/sec)	220 (105)	
Available Cycles*	High, Medium, Low, Delicates	
Cycle Indicator Lights	Yes	
Cylinder Finish	Galvanized	
Available Colors	White	
Door Type (Solid/Window)	Solid or Window	
Available Electrical Requirements - (Voltage/Hz/Ph)	Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp	
Net Weight - lb (kg)	Elec/Gas 265/275 (120/125)	
Shipping Weight - lb (kg)	Elec/Gas 280/290 (127/132)	
Shipping Width - in (mm)	29 (737)	
Shipping Depth - in (mm)	32 3/4 (832)	
Shipping Height - in (mm)	80 (2032)	
Available Agency Approvals	Elec: cUL _{US} , Gas: cCSA _{US}	

* Information shown applies to highest end control available

Note: Not all options are available for all models. Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.

Refer to the price list for the available models and options.

Lower unit is ADA compliant

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2015 Alliance Laundry Systems LLC

Alliance Laundry Systems LLC
Shepard Street
Ripon, WI 54971
1-800-553-5120
huebsch.com

